



**Model 531/532/533**

## **Технические характеристики**

**По вопросам продаж и поддержки обращайтесь:**

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

сайт: [www.mjk.nt-rt.ru](http://www.mjk.nt-rt.ru) || эл. почта: [mkj@nt-rt.ru](mailto:mkj@nt-rt.ru)

## General

Digital indicators for readout of measuring values. The indicators are designed for panel (NEMA 1) or local mounting (NEMA 4X). The instruments come with a pre-printed label sheet with most common engineering units.

Calibration and adjustment are made on the back of the indicator.

The indicators have a built-in simulator for zero and span so adjustment can be easily made without measuring and test equipment. The indicators are equipped with plug-in terminal blocks to ease adjustment and servicing.

## Features

*Field Indicator type 531, 4-20 mA loop powered*

- 3½-digit easy readable LCD display.
- Delivered as a complete digital indicator in NEMA 4X enclosure or as separate display insertion for mounting on a connection box.
- Power supply from the 4-20 mA current loop.
- Internal calibration of zero and span with selectable decimal point location.

*Local Indicator type 532, 4-20 mA loop powered*

- 3½-digit backlit LCD display.
- Dimension 1.89 x 3.82 in, panel cutout 1.7 x 3.67 in.
- Power supply from the 4-20 mA current loop.
- Internal calibration of zero and span with selectable decimal point location.
- Display can be back-lit from a separate power source.

*Local Indicator type 533, 115 VAC powered*

- 3½-digit LED display.
- Dimension 1.89 x 3.82 mm, panel cutout 1.7 x 3.67 in.
- Built-in 24 VDC power supply for 2 or 3-wire transmitter.
- 2 built-in limit relays.
- Internal calibration of zero and span with selectable decimal point location.



Specifications

Type 531

Display type:	3½-digit LCD, height 0.67 in
Supply:	4-20 mA loop powered
Max. voltage drop:	< 3.5 V
Mounting:	Field
Enclosure:	NEMA 4X

Temperature range:	0 to 140 °F
Temp. coefficient:	± 0.0025 %/°F
Accuracy:	± 1 % F.S. incl. linearity
Zero:	± 1000 steps
Span:	12 ... 125 steps/mA

Type 532

Display type:	3½-digit LCD, height 0.55 in
Supply:	4-20 mA loop powered
Max. voltage drop:	< 3.5 V
Mounting:	Panel
Enclosure:	NEMA 1

Temperature range:	0 to 140 °F
Temp. coefficient:	± 0.0025 %/°F
Accuracy:	± 1 % F.S. incl. linearity
Zero:	± 1000 steps
Span:	12 ... 125 steps/mA


Type 533

Display type:	3½-digit LED, height 0.48 in
Supply:	115 VAC
Consumption:	8 VA (approx.)
Transmitter supply:	24 V DC
Limit relays:	2 x, range 0 - 100 % Max. load 48 V AC / 1 A
Mounting:	Panel
Warranty	1 year


Enclosure:	NEMA 1
Temperature range:	0 to 140 °F
Temp. coefficient:	± 0.0025 %/°F
Accuracy:	± 1 % F.S. incl. linearity
Zero:	± 1000 steps
Span:	12 ... 125 steps/mA

Electrical connection


Field Indicator type 531

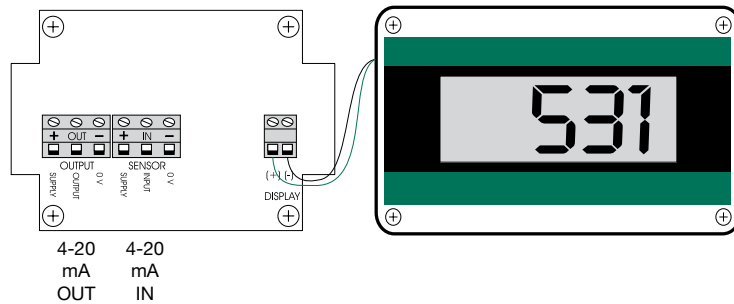

Local Indicator type 532

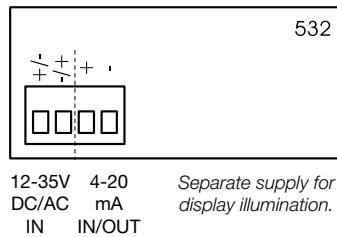

Local Indicator type 533

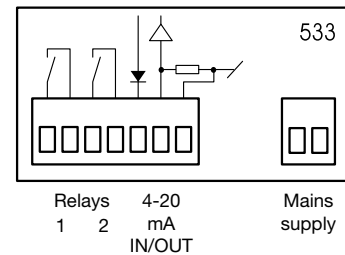


Accessories

To facilitate field mounting and for extra protection a sun shield made from stainless steel can be supplied for the type 531 Digital Indicator.




## Dimensions


Display Indicator Type 531 for field mounting.

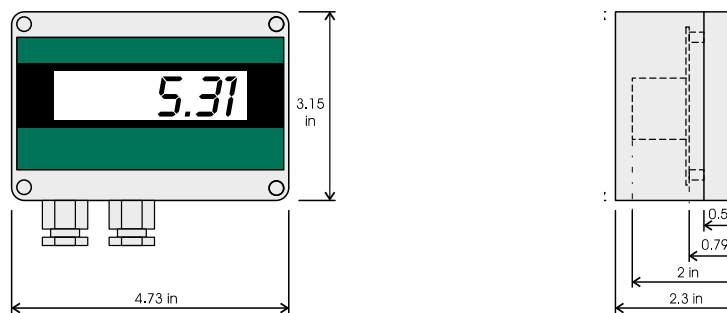

Display Indicator Type 532 for panel mounting.

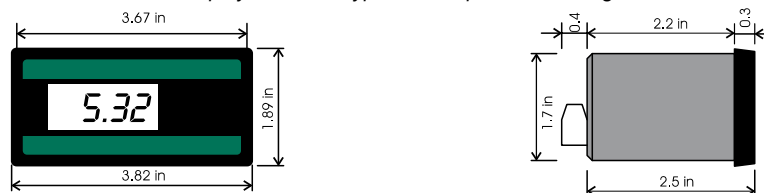

Display Indicator Type 533 for panel mounting.

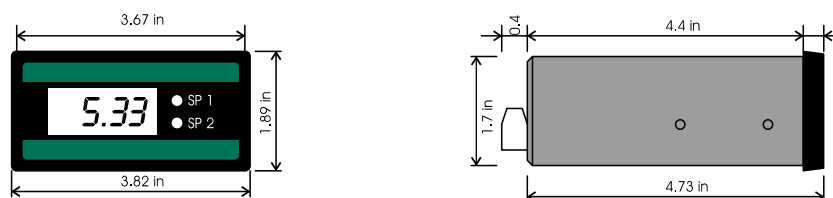

## Order numbers

Order no.:	Description:
200125	Digital Indicator 531 for field mounting complete in NEMA 4X connection box
200126	Display Insert for connection box (Lid with display.)
200117	Sun shield for Display Indicator 531
200121	Digital Indicator 532 for panel mounting
200131	Digital Indicator 533 for panel mounting

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93