



Model 7030

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

сайт: www.mjk.nt-rt.ru || эл. почта: mkj@nt-rt.ru

General

The exceptional reliability of the 7030 Float Switch makes it very suitable for many highly automated systems to provide additional protection against control system failures, preventing pumps from running dry etc. Traditional mercury switches are replaced with up-to-date environmentally friendly

materials in the 7030 Float Switch. The extra durability of the potted switching components, strong multi-fiber flexible cable, rugged polypropylene enclosure, allow the 7030 to deliver reliable results where other float switches fail.

Features


- Environmental friendly - **no mercury!**
- Unmatched rugged construction for durability.
- Very reliable electromechanical contact system - guaranteed for up to 20 million operations.
- The relay contact switch handles loads up to 16 Amps AC so a motor starter can be connected directly.
- Includes 39 ft or 65 ft of rugged, oil resistant PVC cable and polypropylene cable bracket.
- SPDT relay allows normally open or normally closed configurations that are selected by how it is wired.

Function

A hermetically sealed microswitch is activated by a moving counterweight when the float changes its position in the fluid. The changeover hysteresis can be adjusted by

means of a counterweight placed on the cable. The counterweight also ensures that the 7030 float switch is always correctly positioned and makes the bend of the cable less sharp.

Connection and dimension

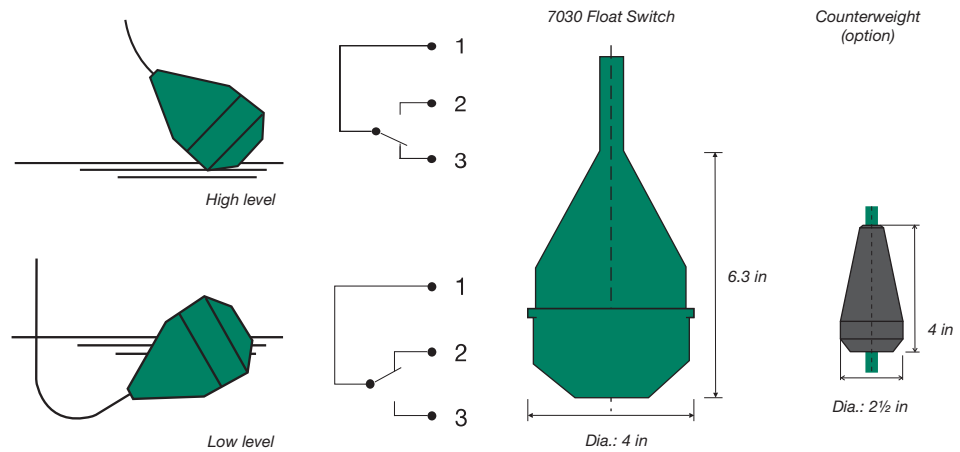

Specifications

MJK Float Switch Model 7030	
Contact system	Mechanical change-over switch (SPDT)
Max. load	16 A @ 200 VAC, 0.5 A @ 220 VDC
Temperature	- 5 to + 150 °F
Materials	Polypropylene / Oil resistant PVC (float housing / cable)
Cable	3 X AWG 17, oil resistant PVC insulation. Length 39 ft, dia. 1/8 in.
Approvals	Switch UL U83 161 3 (16A 125VAC)

Order numbers

Order Numbers	
202810	7030 Float Switch w. 39 ft of cable
560917	Counterweight
202811	7030 Float Switch w. 65 ft of cable
202811-100 ft.	Float Switch w. 100 ft of cable.
<i>Contact MJK for special requests.</i>	



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54
Астана +7(7172)727-132	Калуга (4842)92-23-67	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31
Белгород (4722)40-23-64	Кемерово (3842)65-04-62	Новосибирск (383)227-86-73	Ставрополь (8652)20-65-13
Брянск (4832)59-03-52	Киров (8332)68-02-04	Орел (4862)44-53-42	Тверь (4822)63-31-35
Владивосток (423)249-28-31	Краснодар (861)203-40-90	Оренбург (3532)37-68-04	Томск (3822)98-41-53
Волгоград (844)278-03-48	Красноярск (391)204-63-61	Пенза (8412)22-31-16	Тула (4872)74-02-29
Вологда (8172)26-41-59	Курск (4712)77-13-04	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Воронеж (473)204-51-73	Липецк (4742)52-20-81	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Екатеринбург (343)384-55-89	Магнитогорск (3519)55-03-13	Рязань (4912)46-61-64	Уфа (347)229-48-12
Иваново (4932)77-34-06	Москва (495)268-04-70	Самара (846)206-03-16	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Мурманск (8152)59-64-93	Санкт-Петербург (812)309-46-40	Череповец (8202)49-02-64
Казань (843)206-01-48	Набережные Челны (8552)20-53-41	Саратов (845)249-38-78	Ярославль (4852)69-52-93

сайт: www.mjk.nt-rt.ru || эл. почта: mkj@nt-rt.ru